



2011-2013 Elantra VLand Specific HID Kit

This guide is a quick picture guide on how to install our HID kit into the Hyundai Elantra Vland Headlights

1. Remove the cap off the back of the headlights.
2. Twist bulb retainer counterclockwise to remove, and use the 2 tabs to open it.
3. Insert bulb, and clip back together. Note the notch in the bulb lines up with the nub on the holders. It is important that the bulb be pushed firmly against it once installed. (You will be able to adjust this once in.




4. Remove Vland provided rubber grommet from cap, and cut a small notch. (Doesn't matter where on the circle)
5. Remove clip from Female 9006 Plug as shown, and push plug through the housing cap. Inside-> Outside. And then reattach the clip. (Also push through the 2 black plug which plug into your igniter attached to your ballast).
6. Seat GTA Retrofits included grommet on the cap, as shown

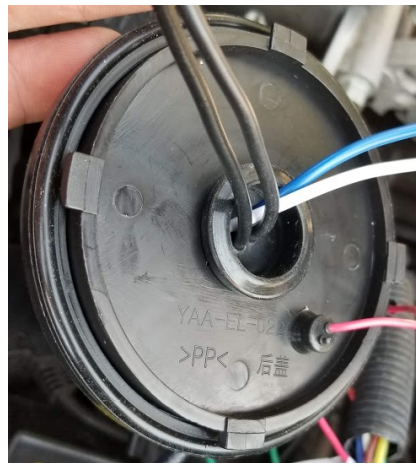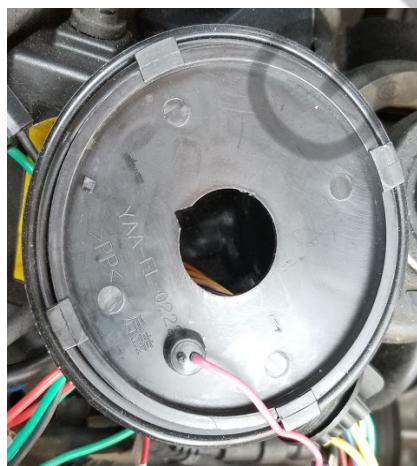

7. Insert bulb into projector. This is 100x easier off the car. You will want to pull the bulb back so that the notch on the d2h bulb stays seated on the bulb holder nub, while twisting it in. Watch our video guide on this step here: <https://youtu.be/UkTp4X5ya-0?t=72>
It will make this step make a lot more sense, even if it is for a different model :)



8. Lastly, insert the bulb power wires (white & blue) into the H7 bulb holder inside the headlight. White -> Black, Blue -> Green. Then twist cap back on.

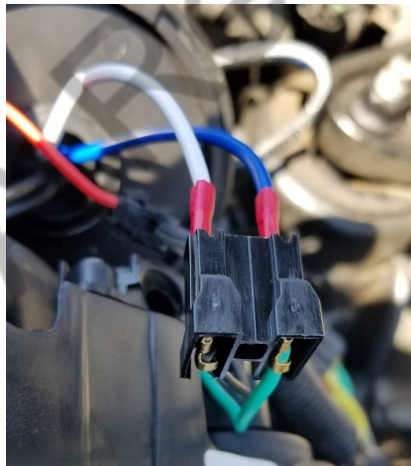

9. If using a relay harness, the 9006 plug will plug into the relay input. If skipping the relay harness, your ballast will plug into the